

# GYNOTECH

Deals In All Medical Equipment



“GYNOTECH IS ONE OF THE LEADING MANUFACTURER AND SUPPLIERS OF HIGH QUALITY OPERATION THEATER EQUIPMENT IN INDIA. WE ARE IN THE INDUSTRY OFFERING THE MARKET GREATER CHOICE, INNOVATIVE AND ERGONOMIC DESIGNS AS WELL AS DURABLE PRODUCTS. SINCE OUR HUMBLE INCEPTION THE COMPANY IS GROWING FROM STRENGTH TO STRENGTH. FROM THE VERY BEGINNING, THE COMPANY HAS FOCUSED ON ITS CORE PRINCIPLES OF CUSTOMER SERVICE, QUALITY, VALUE FOR MONEY AND INNOVATION, AND IT IS THESE PRINCIPLES THAT HAVE ENABLED GYNOTECH TO GAIN THE TRUST OF CUSTOMERS” .



## GENERAL SURGERY & MULTI-PURPOSE HYDRAULIC OT TABLE MODEL NO: GT- 01

This OT Table is suitable for all kind of surgeries, i.e. general surgery, capsular surgery, cardio, neurology, urology, gynecology, proctology, laparoscopy, traumatic surgery, plastic surgery and others. The base & column of the table is made of high quality medical stainless steel (Noncorrosive). Non-reflecting surface, antibacterial & easy to clean. Height adjustment, Lateral tilts, Trendelenburg, and Flex – Reflex, Chair positions are controlled manually.

### SALIENT FEATURE

- Stainless fitting
- Detachable head, leg & Pelvic section Five sectional Radio-Translucent top
- Base & Cover made of attractive easy to clean stainless steel.
- Sophisticated Mechanics provide smooth, step less articulation of the table top for precise patient positioning. Heavy duty concealed hydraulic pump away from leakage & dust due to unique oil filter.

### TECHNICAL SPECIFICATION

- Top dimension L 1800 mm W 533 mm
- Height adjustment with pedal 700 mm – 950 mm
- Trendelenburg / Reverse 30° / 25°
- Lateral tilt 20° / 20°
- Kidney elevator 150 mm
- Back Rest (upward / downward) 80° / 25°
- Leg Rest (upward / downward) 15° / 90°
- Patient Weight Capacity 200 kgs (440 lbs)

### STANDARD ACCESSORIES

- Anesthetic Screen
- Lateral support with pad
- Shoulder supports with pad
- Knee Crutches
- Arm Boards with pad
- Water proof rubber mattress





## GENERAL SURGERY & MULTI-PURPOSE OT TABLE SEMI-ELECTRIC MODEL NO : GT- 02

Full- electric OT table drives with noiseless, jerk less and smooth positioning. Table positions i.e. Height adjustment (By remote control), Trendelenburg, Reverse Trendelenburg, Lateral Tilt, Back Section/Chair Position, Flex-Reflex are controlled manually.

### SALIENT FEATURE

- Manually gear operated Kidney Elevator.
- Table top is divided into 5 sections providing numerous articulation possibilities.
- Radiolucent table top is X-RAY compatible over the entire length of the table.
- Detachable-Interchangeable head and leg sections provide further versatility.
- Integrated weight compensation by manual adjustment of the head and leg sections.
- Remote Control System Offers Define Up And Down Position.
- Non-corrosive stainless steel construction including table top frames, accessories rail, base cover and column telescopic covers.
- Four easy glide, wheels to ensure mobility.
- 50mm decompressed mattress with greater comfort & easy to clean.
- Pedal operated braking system secures the table in its place while in use.



### TECHNICAL SPECIFICATION

- |                                 |                   |
|---------------------------------|-------------------|
| • Top dimension                 | L 1880 x W 533 mm |
| • Height adjustment with pad    | 750 mm – 1050 mm  |
| • Trendelenburg / Reverse       | 30° / 25°         |
| • Lateral tilt left/right       | 20° / 20°         |
| • Kidney elevator               | 150 mm            |
| • Back Rest (upward / downward) | 80° / 25°         |
| • Leg Rest (upward / downward)  | 15° / 90°         |
| • Head Rest (upward / downward) | 20° / 90°         |
| • Power supply                  | 24VDC             |
| • Patient Weight Capacity       | 200 kgs (440 lbs) |

### STANDARD ACCESSORIES

- Anesthetic Screen
- Lateral support with pad
- Shoulder supports with pad
- Knee Crutches
- Arm Boards with pad
- Water proof rubber mattress



## GENERAL SURGERY & MULTI-PURPOSE OT TABLE FULL-ELECTRIC/MOTORIZED MODEL NO: GT-03

Full- electric OT table drives with noiseless, jerk less and smooth positioning. Table positions i.e. Height adjustment, Trendelenburg, Reverse Trendelenburg, Lateral Tilt, Back Section/Chair Position, Flex-Reflex are controlled by dual operations i.e. Corded Handset.

### SALIENT FEATURE


- Manually gear operated Kidney Elevator.
- Table top is divided into 5 sections providing numerous articulation possibilities.
- Radiolucent table top is X-RAY compatible over the entire length of the table.
- Detachable-Interchangeable head and leg sections provide further versatility.
- Integrated weight compensation by manual adjustment of the head and leg sections.
- Remote Control System Offers Define Five Position including Up And Down Position, Chair Position For Seating Operation
- Non-corrosive stainless steel construction including table top frames, accessories rail, base cover and column telescopic covers.
- Four easy glide, wheels to ensure mobility.
- 50mm decompressed mattress with greater comfort & easy to clean.
- Pedal operated braking system secures the table in its place while in use.

### TECHNICAL SPECIFICATION

- |                                 |                   |
|---------------------------------|-------------------|
| • Top dimension                 | L 1880 x W 533 mm |
| • Height adjustment with pad    | 750 mm – 1050 mm  |
| • Trendelenburg / Reverse       | 30° / 25°         |
| • Lateral tilt left/right       | 20° / 20°         |
| • Kidney elevator               | 150 mm            |
| • Back Rest (upward / downward) | 80° / 25°         |
| • Leg Rest (upward / downward)  | 15° / 90°         |
| • Head Rest (upward / downward) | 20° / 90°         |
| • Power supply                  | 24VDC             |
| • Patient Weight Capacity       | 200 kgs (440 lbs) |

### STANDARD ACCESSORIES

- Anesthetic Screen
- Lateral support with pad
- Shoulder supports with pad
- Knee Crutches
- Arm Boards with pad
- Water proof rubber mattress

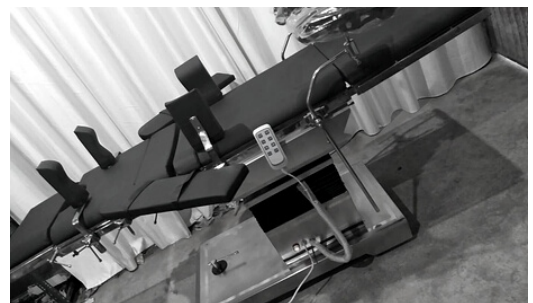



## ORTHOPEDIC / C-ARM COMPATIBLE HYDRAULIC OT TABLE MODEL NO: GT-04

This OT Table is suitable for all kind of surgeries, i.e. general surgery, capsular surgery, cardio, neurology, urology, gynecology, proctology, laparoscopy, traumatic surgery, plastic surgery and others. Table positions i.e. Height adjustment, Trendelenburg, Reverse Trendelenburg, Lateral Tilt, Back Section/Chair Position, are controlled by hydraulic pump/manually.

### SALIENT FEATURE




- Table top is divided into 5 sections providing numerous articulation possibilities.
- Radiolucent table top is C-ARM & X-RAY compatible over the entire length of the table.
- Offset column provide unrestricted access of C-ARM.
- Detachable-Interchangeable head and leg sections provide further versatility.
- Integrated weight compensation by manual adjustment of the head and leg sections.
- Non-corrosive stainless steel construction including table top frames, accessories rail, base cover and column telescopic covers.
- The base & column of the table is made of high quality medical stainless steel (non-corrosive). Non-reflecting surface, antibacterial & easy to clean.
- Four easy glide, wheels to ensure mobility.
- 50mm decompressed mattress with greater comfort & easy to clean.
- High quality braking system secures the table in its place while in use.
- Heavy duty concealed hydraulic pump away from leakage & dust due to unique oil filter.

### TECHNICAL SPECIFICATION

- |                                |                     |
|--------------------------------|---------------------|
| • Top dimension                | L 1800 mmx W 530 mm |
| • Height adjustment with pedal | 700 mm – 950 mm     |
| • Trendelenburg / Reverse      | 30° / 25°           |
| • Lateral tilt                 | 20° / 20°           |
| • Kidney elevator              | 150 mm              |
| • Leg Rest (upward / downward) | 15° / 90°           |
| • Patient Weight Capacity      | 200 kgs (440 lbs)   |

### STANDARD ACCESSORIES

- Anesthetic Screen
- Lateral support with pad
- Shoulder supports with pad
- Knee Crutches
- Arm Boards with pad
- Water proof rubber mattress

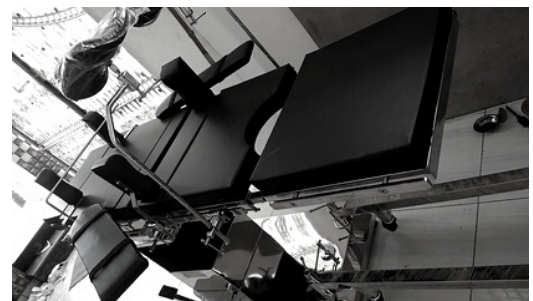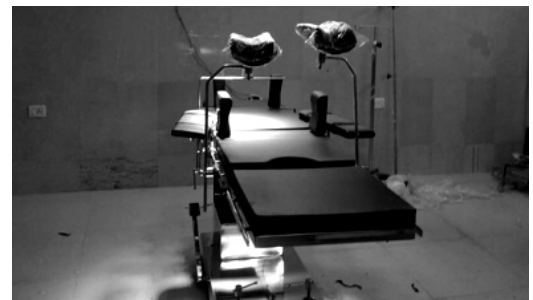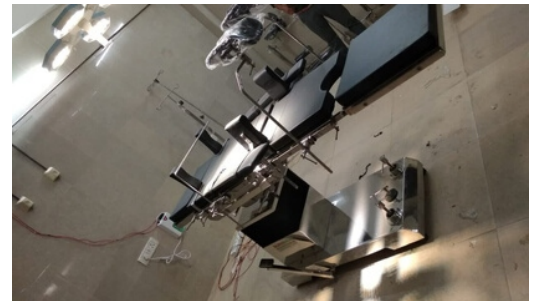




## ORTHOPEDIC / C-ARM COMPATIBLE SEMI-ELECTRIC OT TABLE MODEL NO:GT-05

This OT Table is suitable for all kind of surgeries, i.e. general surgery, capsular surgery, cardio, neurology, urology, gynecology, proctology, laparoscopy, traumatic surgery, plastic surgery and others. The base & column of the table is made of high quality medical stainless steel (Non-corrosive). Nonreflecting surface, antibacterial & easy to clean. Height adjustment (table high-low) controlled by corded Handset, Lateral tilts, Trendelenburg, and Flex – Reflex, Chair positions are controlled manually.

### SALIENT FEATURE

- Table top is divided into 5 sections providing numerous articulation possibilities.
- Table top is x-ray and C-ARM compatible.
- Electric up & down by cable remote
- Eccentricity Positioned Top For Maximum Access For Movement of C-arm Image Intensifier
- Stainless Fitting
- Detachable, head, leg & Pelvic section
- In built kidney bridge
- Base & Cover made of attractive, easy to clean Stainless Steel.
- Sophisticated mechanics provide smooth, step less articulation of the table top for precise patient positioning.

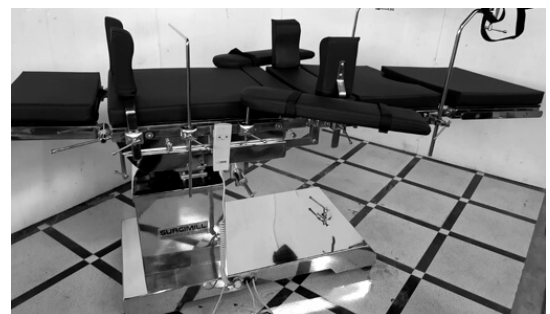

### TECHNICAL SPECIFICATION

- Top dimension L 1800 mmx W 533 mm
- Height adjustment with Remote 700 mm – 950 mm
- Trendelenburg / Reverse 30° / 25°
- Lateral tilt 20° / 20°
- Kidney elevator 150 mm
- Back Rest (upward / downward) 80° / 25°
- Leg Rest (upward / downward) 15° / 90°
- Power supply 24VDC
- Patient Weight Capacity 200 kgs (440 lbs)

### STANDARD ACCESSORIES

- Anesthetic Screen
- Lateral support with pad
- Shoulder supports with pad
- Knee Crutches
- Arm Boards with pad
- Water proof rubber mattress



## ORTHOPEDIC / C-ARM COMPATIBLE

### FULL-ELECTRIC OT TABLE

### MODEL NO: GT-06

This OT Table is suitable for all kind of surgeries, i.e. general surgery, capsular surgery, cardio, neurology, urology, gynecology, proctology, laparoscopy, traumatic surgery, plastic surgery and others. The base & column of the table is made of high quality medical stainless steel (Non-Corrosive). Non-reflecting surface, antibacterial & easy to clean. Height adjustment, Lateral tilts, Trendelenburg, and Chair positions are controlled by corded handset.

### SALIENT FEATURE

- Table top is divided into 5 sections providing numerous articulation possibilities.
- Eccentricity Positioned Top For Maximum Access For Movement Of C-arm Image Intensifier
- Sheet Base And Cover Made Of Heavy & Hygienic Stainless Steel Sheet
- Systems Mobile On Smooth Running wheels And Floor Locking System For Stability
- Remote Control System Offers Define Position Up And Down Position, Chair Position For Seating Operation and Lateral tilts, Trendelenburg positions
- Offset column provide unrestricted access of C-ARM.
- Detachable-Interchangeable head and leg sections provide further versatility.
- Integrated weight compensation by manual adjustment of the head and leg sections.
- 50mm decompressed mattress with greater comfort & easy to clean.
- High quality braking system secures the table in its place while in use.



### OPTIONAL

- Top Slide : With our tabletop longitudinal slide feature, there is no need to reverse patient to achieve full-body fluoroscopic procedures.
- Zero Position to make table neutral by simply pressing '0' positioning button.
- Battery Backup
- Override Panel/Standby Controller: Additional control panel on the table column cover for continue operation in case of remote failure.
- Memory Function - The microprocessor based control system is fully programmable and can store upto two user-programmable preset positions in its memory that can be recalled anytime by simply pressing M1 or M2 button.

### TECHNICAL SPECIFICATION

- |                                 |                     |
|---------------------------------|---------------------|
| • Top dimension                 | L 1800 mmx W 580 mm |
| • Height adjustment with remote | 750 mm – 1000 mm    |
| • Trendelenburg / Reverse       | 30° / 25°           |
| • Lateral tilt                  | 20° / 20°           |
| • Kidney elevator               | 125 mm              |
| • Back Rest (upward / downward) | 80° / 25°           |
| • Leg Rest (upward / downward)  | 15° / 90°           |
| • Power supply                  | 24VDC               |
| • Patient Weight Capacity       | 200 kgs (440 lbs)   |

### STANDARD ACCESSORIES

- |                              |                               |
|------------------------------|-------------------------------|
| • Anesthetic Screen          | • Knee Crutches               |
| • Lateral support with pad   | • Arm rest with pad           |
| • Shoulder supports with pad | • Water proof rubber mattress |



## C-ARM OT TABLE WITH SPLIT LEG

### ELECTRO-MANUAL OT TABLE

### MODEL NO: GT-07

One of the most universal operating tables on the market. It combines a multitude of available positions with a high maximum load and a very good parameter of the tabletop translucency or longitudinal shift. A wide range of accessories allows it to be used in virtually any type of surgery.

### SALIENT FEATURE

- Five Section Radio translucent table top without any cross member facilities C-arm imaging.
- Operating positions i.e. Height adjustment, Trendelenberg, Reverse Trendelenberg, Lateral Tilt, back section up-down and split-leg movement are precisely and smoothly controlled by cabled remote control through imported Linear Actuators.
- Remote is ergonomically designed to have an easy and better grip with symbolic position figures.
- Manual backup of Height adjustment, Top Slide, Trendelenberg, Reverse Trendelenberg, Lateral Tilt and back section by hand lever in case of electrical failure.
- The head and leg section are detachable and interchangeable capacitating a single table use in varied surgical procedures. These are manually operated by means of ratchet system.
- Manually operated jack type kidney elevator flushed with the table top.
- Lock & Unlock Lever for the mobility of the table on wheels
- Remote Control with cable connection having Appropriate length.

### OPTIONAL


- Zero Position to make table neutral by simply pressing '0' positioning button.
- Battery Backup
- Override Panel/Standby Controller: Additional control panel on the table column cover for continue operation in case of remote failure.
- Memory Function - The microprocessor based control system is fully programmable and can store upto two user-programmable preset positions in its memory that can be recalled anytime by simply pressing M1 or M2 button.

### TECHNICAL SPECIFICATION

- |                                 |                   |
|---------------------------------|-------------------|
| • Top dimension                 | L 1960 x W 530    |
| • Height adjustment with remote | 700 mm – 950 mm   |
| • Trendelenburg / Reverse       | 30° / 25°         |
| • Lateral tilt                  | 20° / 20°         |
| • Kidney elevator               | 130 mm            |
| • Back Rest(Up-Down)            | 80°/25°           |
| • Head Rest (up-Down)           | 20°/60°           |
| • Leg Rest (upward / downward)  | 15° / 90°         |
| • Power supply                  | 24VDC             |
| • Patient Weight Capacity       | 250 kgs (666 lbs) |

### STANDARD ACCESSORIES

- |                              |                               |
|------------------------------|-------------------------------|
| • Anesthetic Screen          | • Knee Crutches               |
| • Lateral support with pad   | • Arm rest with pad           |
| • Shoulder supports with pad | • Water proof rubber mattress |

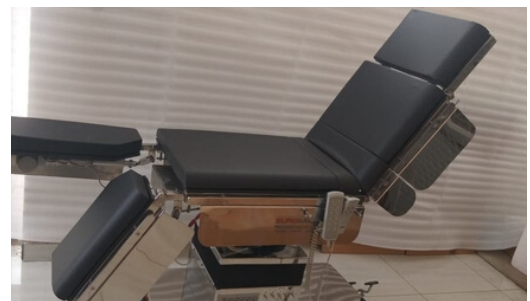



## OBSTETRIC / GYNECOLOGICAL OT TABLE HYDRAULIC MODEL NO: GT-08

Operating Table for Gynaecology and Obstetrics offers Gynaecologists complete flexibility while doing gynaecological procedure. Designed and developed particularly for Gynaecology procedures. Our range of Gynaecology OT Tables are used for surgical procedures unlike the General surgery OT table & Urology OT Tables. positions i.e. Height adjustment (Hydraulic pump), Back Section/Chair Position are controlled manually.

### SALIENT FEATURE

- Table is equipped with heavy mattress, below at the pillar.
- Three section upholstered table top ensures maximum comfort to the patient.
- Detachable leg sections offer perineal access & allow to attach drainage tray.
- Integrated weight compensation by manual adjustment of leg section.
- Large size stainless steel drainage tray
- Non-corrosive stainless steel construction including table top frames, accessories rail, base cover and column telescopic covers.
- Easy for cleaning & hygiene.
- Four easy glide, antistatic wheels to ensure mobility.
- Heavy duty concealed hydraulic pump away from leakage & dust due to unique oil filter.
- High quality braking system secures the table in its place while in use.



### TECHNICAL SPECIFICATION

- Top dimension L 1800 mmx W 533 mm
- Height adjustment 700 mm – 950
- Leg Rest (upward / downward) 15° / 90°
- Back Rest (upward / downward) 90° / 0°
- Patient Weight Capacity 200 kgs (440 lbs)
- Table Weight ~ 125Kg

### STANDARD ACCESSORIES

- Anesthetic Screen
- Lateral support with pad
- Shoulder supports with pad
- Knee Crutches
- Arm rest with pad
- Water proof rubber mattress
- Drainage tray



## OBSTETRIC / GYNECOLOGICAL OT TABLE ELECTRIC MODEL NO: GT-09

Surgimill MET 4-02 is electric operation table for gynecology and obstetrics. With full affinity profile. It overcomes the slow speed of similar products. It has many functions like lifting (Height adjustment) , back movements, leg movement by electric lifting, which is convenient for patients to facilitate medical staff for all kinds of gynecological medical and surgical operation.

### SALIENT FEATURE


- Three section upholstered table top ensures maximum comfort to the patient.
- Detachable leg sections offer perineal access & allow to attach drainage tray.
- Integrated weight compensation by motorized adjustment of leg section.
- Large size stainless steel drainage tray
- Non-corrosive stainless steel construction including table top frames, accessories rail, base cover and column telescopic covers.
- Range of table movements controlled via the remote control:
  - Height adjustment
  - Back rest section
- The powered movements are activated by linear actuators.
- Four easy glide, antistatic wheels to ensure mobility.
- High quality braking system secures the table in its place while in use.

### TECHNICAL SPECIFICATION

- |                                 |                     |
|---------------------------------|---------------------|
| • Top dimension                 | L 1800 mmx W 533 mm |
| • Height adjustment             | 700 mm – 950        |
| • Leg Rest (upward / downward)  | 15° / 90°           |
| • Back Rest (upward / downward) | 90° / 0°            |
| • Power supply                  | 24 VDC              |
| • Patient Weight Capacity       | 200 kgs (440 lbs)   |
| • Table weight                  | ~160Kg              |

### STANDARD ACCESSORIES

- Anesthetic Screen
- Lateral support with pad
- Shoulder supports with pad
- Knee Crutches
- Arm Boards with pad
- Water proof rubber mattress
- Drainage tray

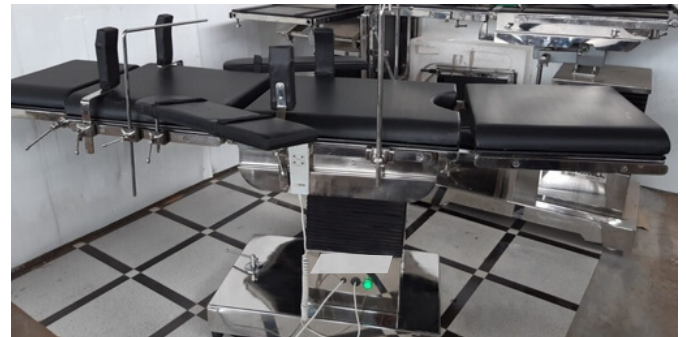



## OT TABLE ATTACHMENT

### BASE ORTHOPEDIC ATTACHMENT

- The Orthopedic Attachment can be used with any operating table.
- In addition, a pelvic support plate is supported on top of the frame and is formed with an asymmetrical construction.
- Stirring Instruments allows flexion/raising of legs & stirring/string ball joints locked from foot end.
- Two traction devices on sliding spot with ball joint allowing flexions & rotations of foot with traction shoe with metallic sole.
- Padded orthopedic knee crutches/provides support to the legs of the patient.



### STANDARD ACCESSORIES

- Tibia Nailing
- Femur Nailing
- Hip Prosthesis
- Steinmen Pin Holder
- PerinealPost



### HANGING ORTHOPEDIC ATTACHMENT

This Hanging extension device makes possible trouble-free treatment of the extremities under traction; it could be used in conjunction with a multipurpose operating table or any other C-ARM table. The functional principle utilized here is the bar and socket system, acknowledged for years now due to its easy handling; this tried-and-tested concept has proven its worth in practice. for open and closed intramedullary nailing consisting of:

- Bar configuration made entirely of stainless steel, with two traction bars installed so as to be pivotable at two joints each, making possible trouble-free intraoperative use of the image intensifier in both the a.p. and lateral planes. Professional functional design
- Simple and secure attachment to the operating table with the help of the practical transport cart.
- Perfect patient positioning, easy to set up.
- Only a single staff member is required to place the patient in almost all positions.
- Simplest attachment of accessory components using a socket-based system.
- Excellent freedom for using the image intensifier.
- Non-rusting design using CrNi steel, resistant to Disinfectants.





# GYNOTECH

Deals In All Medical Equipment

## Model No:- GT-10



Length : 75"

Width : 36"

Height : 22"

**Finish : Pre-treated and powder coated**

### MANUAL FOWLER BED WITH ABS PANEL AND COLLAPSIBLE RAILING

- Mattress area divided into 4 sections, mounted on 4 castors two with brake.
- 2 Separate crank mechanisms for Backrest and Knee rest respectively.
- Uniformly perforated four section mild steel CRCA sheet top
- Framework made from mild steel ERW rectangular tubes
- IV stand provision on four locations.

#### ACCESSORIES:

3" Mattress

ABS head & foot panel

#### Optional:

Collapsible Railing

Castor Wheels

### MANUAL FOWLER BED WITH ABS PANELS AND ABS SIDE RAILLING

- Mattress area divided into 4 sections, mounted on 4 castors two with brake.
- Detachable ABS head and foot bows provide a soothing look.
- 4 pieces individual ABS side rails
- IV stand provision on four locations.
- The complete metal components are pre treated and epoxy powder coated.
- 2 Separate crank mechanisms for Backrest and Knee rest respectively.

Length : 2030 mm

Width : 900 mm

Finish : Pre-treated and powder coated

Height : 600 mm

## Model No :- GT-11



#### OPTIONAL:

4 Section Mattress

S.S Telescopic I.V. Rod



## Model No:- GT-12

### ELECTRIC FOWLER BED WITH ABS PANEL



- Advance Linear actuator system [02 Pcs Motor, 01 Pcs Handset].
- Two Pieces individual detachable SS side railing.
- Abs Moulded Head & Foot Panel with locking.
- Framework made from M.S. Tubes.
- 4 Sectional Top Made -up of CRCA M.S Sheet.
- Bed mounted on 100mm castors , 2 with break.
- Finish Pretreated & Epoxy Powder Coated.
- Overall Approx Size: 2090L x 910W x 600H MM.
- Position Obtained by Hand Remote
  - (a). Backrest Elevation.
  - (b). Kneerest Elevation.

### ELECTRIC FOWLER BED WITH ABS PANELS AND ABS SIDE RAILLING

## Model No:- GT-13

- Advance Linear actuator system [02 Pcs Motor, 01 Pcs , 01 Pcs Handset].
- Mattress area divided into 4 sections, mounted on castors two with brake.
- Detachable ABS head and foot bows provide a soothing look.
- 4 pieces individual ABS side rails
- IV stand provision on four locations.
- The complete metal components are pre treated and epoxy powder coated.



Length v	2030 mm
Width	900 mm
Finish	Pre-treated and powder coated

OPTIONAL:  
4 Section Mattress  
S.S Telescopic I.V. Rod  
Controle panel



## MANUAL SEMI-FOWLER BED

Model No:- GT-14



Length : 75"

Width : 36"

Height : 26"

**Finish : Pre-treated and powder coated**

### MANUAL SEMI- FOWLER BED WITH ABS PANEL

- Backrest adjustable on crank mechanism
- Stainless steel handle for backrest adjustment
- Uniformly perforated two section mild steel CRCA sheet top
- Framework made from mild steel ERW rectangular tubes
- Four locations on bed frame for telescopic IV pole
- "H" type legs fitted with four castor wheels
- Pretreated and powder coated finish

#### ACCESSORIES:

Mattress

ABS head & foot panel

#### OPTIONAL:

Collapsible side Railing

Castor Wheels

### MANUAL SEMI-FOWLER BED WITH SS LAMINATED PANEL

- Frame work of bed is made of Rectangular Tube
- 2 Section Top is made of perforated sheet.
- Backrest positions obtained by Smooth Crank System with foldable handles.
- Laminated wooden Head and Foot panels with SS tube.
- Legs mounted on hard rubber or wheels.
- IV stand provision on four locations.
- The complete metal components are pre treated and epoxy powder coated.

Length 190 cm

Width 90 cm

Finish Pre-treated and powder coated

Height 55 cm

Model No:- GT-15



#### OPTIONAL:

2 Section Mattress

S.S Telescopic I.V. Rod



## MANUAL ICU BED

### FIVE FUNCTIONAL MANUAL ICU BED WITH ABS PANELS & ABS RAILINGS

Model No:- GT-16



Length : 2030 mm  
Width : 900 mm  
Finish : Pre-treated and powder coated  
Height : 600 mm

- Frame work of bed is made of Rectangular Tube.
- 4 Section Top made of Oval Shape perforated CRCA M.S Sheet.
- ABS Moulded Four individual side rails.
- ABS Moulded Head and Foot panel with locking.
- Bed Mounted on 125mm Dia Castors, 2 with brakes.
- Holder for Urine bag.
- S.S. Telescopic IV Rod with 4 Locations.
- Back Rest, Knee Rest, Trendlenburg / Reverse Trendlenburg and Hi-Lo Positions obtained by smooth crank system with foldable handles.

### FIVE FUNCTIONAL MANUAL ICU BED WITH ABS PANEL AND COLAPSIBLE RAILING

- Frame work of bed is made of Rectangular Tube.
  - 4 Section Top made of Oval Shape perforated CRCA M.S Sheet.
  - Collapsible safety side railings.
  - ABS moulded Head and Foot panel with locking.
  - Bed Mounted on 125mm Dia Castors, 2 with brakes.
  - S.S. Telescopic IV Rod with 4 Locations.
  - Back Rest, Knee Rest, Trendlenburg / Reverse Trendlenburg and Hi-Lo Positions obtained by smooth crank system with foldable handles
- OPTIONAL: IV rod.

Model No:- GT-17





## ELECTRIC ICU BED

### THREE FUNCTIONAL ELECTRIC ICU BED WITH ABS PANEL AND ABS RAILING

Model No:- GT-18

- Completely Motorized 3Pcs Actuators, 1 Control Box, 1Pc Handset.
  - Frame work of bed is made of Rectangular Tube.
  - 4 Section Top made of Oval Shape perforated CRCA M.S Sheet.
  - ABS Moulded Four individual side rails.
  - ABS Moulded Head and Foot panel with locking.
  - Bed Mounted on 125mm Dia Castors, 2 with brakes.
  - Holder for Urine bag.
  - S.S. Telescopic IV Rod with 4 Locations.
  - Back Rest, Knee Rest and Hi-Lo Positions obtained by electric actuator operated by hand remote system.
  - Finish Pretreated & Epoxy Powder Coated.
- Size: 1982 x 915 x 585 - 710mm



OPTIONAL:  
battery backup  
Nurse Panel  
Center loking castors

Model No:- GT-19



OPTIONAL:  
battery backup  
Nurse Panel  
Center loking castors

ECONOMY  
MODEL

### THREE FUNCTIONAL ELECTRIC ICU BED WITH ABS PANEL AND COLLAPSIBLE RAILING

- Completely Motorized 3Pcs Actuators, 1 Control Box, 1Pc Handset.
  - Frame work of bed is made of Rectangular Tube.
  - 4 Section Top made of Oval Shape perforated CRCA M.S Sheet.
  - SS collapsible side rails.
  - ABS Moulded Head and Foot panel with locking.
  - Bed Mounted on 125mm Dia Castors, 2 with brakes.
  - Holder for Urine bag.
  - S.S. Telescopic IV Rod with 4 Locations.
  - Back Rest, Knee Rest and Hi-Lo Positions obtained by electric actuator operated by hand remote system.
  - Finish Pretreated & Epoxy Powder Coated.
- Size: 1982 x 915 x 585 - 710mm



## HOSPITAL BED

Model No:- GT-20

### DELUXE PLAIN BED



- Tubular Head & Foot Bows with SS Panel.
- Framework Made-up of M.S.Tubes.
- Top made-up of Oval perforated CRCA M.S. Sheet.
- Legs fitted with PVC Stumps.
- Four Location for I.V. Rod.
- Finish : Pretreated & Epoxy Powder Coated.
- Overall Approx. Size: 2090L x 910W x 600H MM.

**Optional:**

Plain Mattress

SS Telescopic I.V.Rod

## GENERAL PLAIN BED

Model No:- GT-21

- Tubular Head & Foot Bows .
- Framework Made-up of M.S.Tubes.
- MS 18 Gauge for tubes & 16 Gauge for Sheet.
- Top made-up of perforated CRCA M.S. Sheet.
- Legs fitted with PVC Stumps.
- Four Location for I.V. Rod.
- Finish : Pretreated & Epoxy Powder Coated.
- Overall Approx. Size: 2090L x 910W x 600H MM.



**Optional:**

Plain Mattress

SS Telescopic I.V.Rod



## GYNAE / OBSTETRIC TABLE

Model No:- GT-22



### GYNAE EXAMINATION TABLE

- Frame work made of rectangular / square M.S. Tube. Backrest section adjustable on Ratchet/ Lever
- Legs fitted with PVC stumps
- foam cushioned top covered with rexine with perineal cut
- Adjustable lithotomy poles with straps.
- Epoxy Powder Coated. Size: 150 x 60 x 46 (L x W x H cms)

### OBSTETRIC DELIVERY TABLE (THREE SECTION)

- Overall Size : 180L x 60W x 80H cms
- Framework made of Mild Steel
- Back rest section adjustable on Ratchet / Lever.
- Legs fitted with PVC Stumps 5 cms foam cushioned top covered.
- Adjustable lithotomy poles with straps.
- Drainage tray

Model No:- GT-23



Model No:- GT-24



### OBSTETRIC DELIVERY TABLE TELESCOPE FIXED HEIGHT SS

- Overall Approx Max. Size : 72" x 27" x 30". 2. Frame work made from SS Tubes.
- Legs fitted with PVC Stumps.
- 3 Section top made of SS Sheet.
- Back rest section adjustable on ratchet
- Leg end section can slide under the main section.
- The entire table top gives trendelburg positions by screw mechanism system.
- Removable safety side railing are provided on 2sides of the table.
- Pair of foam padded knee crutches.
- Patient bearing down hand grips made of SS Tubes.
- Supplied with waste collecting SS Bowl on SS Bracket and one SS I.V Rod.
- Provided 3 Sectional Mattress.



### Model No:- GT-25



### OBSTETRIC LABOR TABLE TELESCOPIC (ADJUSTABLE HEIGHT)

- Approx Dimensions: 72"L x 27"W x 32"H
- Tubular framework mounted on swiveling castors.
- Back rest section adjustable on ratchet
- Leg end section can slide under the main section.
- The entire table top gives trendelburg positions by Screw Mechanism.
- Removable safety side railing are provided on 3 sides of the table.
- **Motorized Height Adjustment by hand remote**
- A Pair of foam padded knee crutches.
- Patient bearing down hand grips made of SS Tubes.
- Supplied with waste collecting SS Bowl on SS Bracket and one SS I.V Rod.
- Provided 3 Sectional Mattress.

### LABOUR DELIVERY ROOM BED (HYDRAULIC)

- Overall Size : 1880L x 660W x 600 - 800 H mm.
- Tubular Framework mounted on 125mm dia castors two with break.
- Three section top made of Bakelite Sheet covered with mattress.
- Trendelburg / Reverse trendelberg positions adjustment through gear mechanism.
- Height adjustment through imported hydraulic pump.
- Back Section adjustment through ratchet system.
- Leg end section can slide under the main section.
- Provided with a pair of Upholstrey Lithotomy positions.
- S.S Telescopic I.V Rod & Detachable S.S Tray.

### Model No:- GT-26



### Model No:- GT-27



### LABOUR DELIVERY ROOM BED (ELECTRIC)

- Overall Size : 1880L x 660W x 600 - 800 H mm.
- Tubular Framework mounted on 125mm dia castors two with break.
- Three section top made of Bakelite Sheet covered with mattress.
- Trendelburg / Reverse trendelberg positions, Height adjustment, Back Section adjustment through electric actuator system.
- Leg end section can slide under the main section.
- Provided with a pair of Upholstrey Lithotomy positions.
- S.S Telescopic I.V Rod.
- Detachable S.S Tray.



## EXAMINATION/TREATMENT TABLE

### EXAMINATION TABLE

- Approx Dimensions: 72"L x 24"W x 32"H.
- Frame work Rectangular & Square Steel tubes.
- Adjustable Back rest by hand lever.
- 2 section cushioned top.
- Legs fitted with PVS stands.
- Pre-treated & Epoxy Powder Coated

Model No:- GT-28



Model No:- GT-29



Length : 187 cm  
Width : 51 cm  
Finish : Pre-treated and powder coated  
Height : 81 cm

### TREATMENT/ EXAMINATION TABLE WITH SINGLE CABINATE

- Two section foam padded, upholstered top
- One drawers
- One cabinets
- Tray for B. P. apparatus
- Pre treated & epoxy powder coated

OPTIONAL:

Single / Double foot step

Model No:- GT-30

### TREATMENT/ EXAMINATION TABLE WITH THREE CABINATE

- Adjustable backrest by gas spring system
- Two section foam padded, upholstered top
- Three drawers
- Three cabinets
- Tray for B. P. apparatus
- Pre treated & epoxy powder coated





## DELUX ABS BED SIDE LOCKER

- Overall Size: 450Lx 450Wx760Hmm.
- One drawer.
- One Cabinet.
- One Towel Rail.
- Four 50mm Castors.

Model No:- GT-31



Model No:- GT-32



## DELUXE BEDSIDE LOCKER

- Overall Size: 16"L x 16"W x 32"H.
- CRCA Sheet Constructions.
- Having one box.
- Having one drawer.
- Jointless SS Top with three sides raise edgrs.
- Finish: Pretreated and Epoxy Powder Coated

## GENERAL BED SIDE LOCKER BED SIDE LOCKER

- Adjustable backrest by gas spring system
- Two section foam padded, upholstered top
- Three drawers
- Three cabinets
- Tray for B. P. apparatus
- Pre treated & epoxy powder coated

Model No:- GT-33



Model No:- GT-34



## BED SIDE LOCKER THREE SHELVES

- Overall Size : 16Lx 16W x 32H inch.
- Complete Stainless Steel.
- Three SS Shelves.
- Three Side Railing.



## MANUAL SEMI-FOWLER BED

### MANUAL SEMI- FOWLER BED

Model No:- GT-35



Length : 2030 mm

Width : 900 mm

Finish : Pre-treated and powder coated

Height : 600 mm

- M. S. Head & Foot Panel.
- Frame work made-up of M.S. Tubes.
- 2 Section top made-up of Oval perforated CRCA M.S. Sheet.
- "H" type legs fitted with rubber shoes
- Four Location for I.V. Rod
- Finish: Pretreated & Epoxy Powder Coated.
- Positions Obtained by Smooth Crank System with foldable handle Backrest Elevation.

### ELECTRIC SEMI-FOWLER BED WITH ABS PANEL

Model No:- GT-36

- Advance Linear actuator system [01 Pcs Motor, 01 Pcs Handset].
- Abs Moulded Head & Foot Panel with locking.
- Framework made from M.S. Tubes.
- 2 Sectional Top Made -up of CRCA M.S Sheet.
- Leg fitted with PVC Stumps.
- Finish Pretreated & Epoxy Powder Coated.
- Overall Approx Size: 2030L x 900W x 600H MM.
- Position Obtained by Hand Remote (a). Backrest Elevation.



OPTIONAL:

2 Section Mattress

S.S Telescopic I.V.

Side rail

Castor wheels



## S.S INSTRUMENT TROLLY

- Two SS Shelves, SS Rails to cover three on four 7.5cm.
- swivel castors, two with breaks.
- Wholly made of stainless steel. Size:- 30"L x 18"W x 34" H

Model No:- GT-38



Model No:- GT-37



## S.S INSTRUMENT TROLLY BIG SIZE

- Two SS Shelves, SS Rails to cover three on four 7.5cm. swivel castors, two with breaks.
- Wholly made of stainless steel.
- Size:- 38"L x 21"W x 34"

## S.S DRESSING TROLLY

- Two S.S Shelves, S.S Rails to cover three sides of top shelf & four sides of bottom,
- S.S Tubular Steel Frame, on four 10cm Swivel castors, provided with S.S Bowl and bucket,
- Wholly made of Stainless Steel,
- Size :- 30" L x 18" W x 34" H.

Model No:- GT-39



Model No:- GT-40



## MEDICINE TROLLEY

- 2 drawers for storage
  - S.S Tubular Steel Frame, on four 10cm Swivel castors,
  - Material SS Finishing
- Also available with 4 drawers



Model No:- GT-41



## ECG TROLLEY

- Overall approx dimension: 610 mm L X 510 mm W X 850 mm H
- MS tubular frame work
- Three shelves, Top Shelf Stainless Steel and Two Shelf MS
- Push handle-SS
- 125 mm Non rusting wheel two with lock
- Pretreated and power coated

## SS MAYO'S INSTRUMENT TROLLEY SINGLE STAND

- Mayo's type, Height Adjustable trolley
- Mounted on four 5 cm castors
- Wholly made of stainless steel.

Model No:- GT-42



Model No:- GT-43



## S.S MAYO'S TROLLEY DOUBLE STAND

- Wholly made of Stainless Steel,
- Adjustable Height suitable to use over the operation table, mounted on four 5 cm castors.

Model No:- GT-44



## OT INSTRUMENT MAYO'S TROLLEY OVER THE OT TABLE

- Approx Tray S.S Size: 91L x 50W cms.
- Frame work of S.S tube mounted on 10cm castors.
- Height adjustment by gear handle two side.
- S.S frame with S.S top



# GYNOTECH

Deals In All Medical Equipment

Model No:- GT-45



## REVOLVING STOOL FULL S.S WITH FIBER TOP

- Four legs base SS fitted with PVC stumps
- Height adjustment by machine screw from 18" x 27"
- A foot rest ring support made of SS tubes.
- Cushioned top supported with SS circle.

## RECTANGULAR STOOL PC WITH SS TOP

- Four legs base fitted with PVC stumps.
- Height adjustment by machine screw from 18" x 27"
- A foot rest ring support made of MS tubes.
- Cushioned top supported with MS circle.
- Finish : Pretreated and Epoxy Powder Coated.

Model No:- GT-46



Model No:- GT-47



## CYLINDER TROLLY

- Tubular frame work
- Two 10 cms Castors.
- M.S. Sheet base plate.
- Available for big or small cylinders.
- **A for D type cylinder(Big cylinder)**
- **B for B type cylinder (Small Cylinder)**
- Finish : Pre-treated and Epoxy Powder Coated.

## S.S. KICK BOWL/ BUCKET

- Approx. S.S Bowl of 350mm.
- Frame work made of SS tubes.
- Mounted on 50mm Castors
- Finish : Stainless Steel.
- Also available in M.S Frame work and SS Basin / Bucket

Model No:- GT-48





# GYNOTECH

Deals In All Medical Equipment

Model No:- GT-49



## BEDSIDE SCREEN WITH CURTAIN (3 PANELS)

- Overall Size : 1680H x 2450L mm.
- M.S Tubular Frame work made of 19mm x 18G in three section.
- Legs made of 25mm x 18G mounted on 5cms castors with hooks & springs along with curtain.
- Each Span 610mm wide.
- Finish : Pretreated and Epoxy Powder coated.

## BEDSIDE SCREEN WITH CURTAIN (4 PANELS)

Overall Size : 1680H x 2450L mm.  
M.S Tubular Frame work made of 19mm x 18G in four section.  
Legs made of 25mm x 18G mounted on 5cms castors with hooks & springs along with curtain.  
Each Span 610mm wide.  
Finish : Pretreated and Epoxy Powder coated.

Model No:- GT-50



Model No:- GT-51



## FOOT STEP SINGLE

- Tubular frame work
- Two 10 cms Castors.
- M.S. Sheet base plate.
- Available for big or small cylinders.
- **A for D type cylinder(Big cylinder)**
- **B for B type cylinder (Small Cylinder)**
- Finish : Pre-treated and Epoxy Powder Coated.

## FOOT STEP DOUBLE

- Overall approx size : 505mm L X 305mm W X 230mm H.
- Step made of CRCA sheet fitted with PVC Stumps.
- Frame made of 1"X18G CRCA Tube fitted with PVC Stumps.
- Finish : Pretreated and Epoxy Powder Coated.

Model No:- GT-52





# GYNOTECH

Deals In All Medical Equipment

Model No:- GT-53



## EMERGENCY & RECOVERY TROLLEY HYDRAULIC

- Two Section Top.
- Height adjusted by foot operated hydraulic pump from 660mm to 910mm.
- Complete with corner buffers, synthetic rubber covered handles, sliding X-Ray cassette, accessories tray, oxygen cylinder holder, SS telescopic IV Rod and swing away side rails.
- Finish : Pretreated and Epoxy Powder Coated.
- Four Swivel castors, 5" dia, two with total lock.
- X-ray translucent removable stretcher, backrest raised on ratchet.
- Overall approx Size: 210L x 65W x 65.95H cms.

## EMERGENCY & RECOVERY TROLLEY MANUAL

- Two Section Top.
- Height adjusted by smooth gear mechanism system.
- Complete with corner buffers, synthetic rubber covered handles, sliding X-Ray cassette, accessories tray, oxygen cylinder holder, SS telescopic IV Rod and swing away side rails.
- Finish : Pretreated and Epoxy Powder Coated.
- Four Swivel castors, 5" dia, two with total lock.
- X-ray translucent removable stretcher, backrest raised on ratchet.
- Overall approx Size: 210L x 65W x 65.95H cms.

Model No:- GT-54



Model No:- GT-55



### Optional

- Mattress
- Side railing
- S.S. IV rod.



## STRETCHER TROLLEY

- Frame work made of 1.25" x 16G vertical and 1" x 18G horizontal CRC tubes.
- Trolley mounted on 15xms. dia castors, 2with breaks.
- Removable stretcher top made of M.S.Sheet with S.S. handle.
- Overall size 213L x 56W x 81H cms
- Finish : Pretreated and Epoxy Powder Coated.



# GYNOTECH

Deals In All Medical Equipment

Model No:- GT-56

## CRASH CART S.S.



- Overall Approx Size : 960 L x 500 W x 1545 H mm.
- Frame work made of S.S Tubes.
- Two light weight polystyrene boxes each with three drawer.
- Upper drawer with medicine container of different sizes.
- Provision to hold oxygen cylinder made of S.S.
- Massage board for cardiac patient are provided
- Five number colour hand out small bins at eye level
- 8. Provided with S.S I.V rod, corner buffers.
- The Cart mounted on 125mm dia castors 2 with breaks.

Also available in M.S. frame work and laminated



## LAPROSCOPIC TROLLEY

Model No:- GT-57

- Overall approx size: 800mm L x 600mm D x 1400 H
- Four shelves adjustable and one drawer
- Trolley having two handle
- The trolley mounted on 125mm dia castors 2 with breaks.
- Switch & Socket for medical equipment.
- Supplied with S.S. IV rod and MS oxygen gas cylinder cage
- Finish: Pretreated and Epoxy Powder Coated.



Model No:- GT-58

## INSTRUMENT CABINATE

- Galvanized Mild Steel sheet contruction
- Total 6 shelves including bottom platform
- Lockable Doors
- Mild Steel pipe doors with glass inside
- Leveling Screws on 4 feet
- Epoxy powder coated finish



Model No:- GT-59

## WHEEL CHAIR FOLDING

1. Invalid Wheel Chair Folding
2. Fixed Armset and Footrest
3. Finish : Pretreated and Epoxy Powder Coated.

## WHEEL CHAIR NON-FOLDING

1. Invalid Wheel Chair Non - Folding
2. Finish : Pretreated and Epoxy Powder Coated.



Model No:- GT-60



Model No:- GT-61

## WHEEL CHAIR INVALID COMMODE

1. Invalid Wheel Chair with commod
2. Finish : Pretreated and Epoxy Powder Coated.

## COMMODE CHAIR

1. Size- Standard
2. Seat Material Plastic, Frame Mild Steel
3. Foldable
4. Material Metal & Fibre
5. Finish : Pretreated and Epoxy Powder Coated.





# GYNOTECH

Deals In All Medical Equipment

Model No:- GT-63

## ANESTHESIA TROLLEY SS



- Two gases Rota meter Oxygen & Nitrous- Oxide
- Oxygen Flow meter range 100 cc/min. to 10 liters/ min., Nitrous Oxide Flow meter range 200 cc/min to 12 liters/min.\* Standard fresh gas Outlet.
- Change over system Open Circuit to close Circuit.
- Emergency Flush valve at front Panel connected to incoming O2 supply
- Goldman type halothane vaporizer.
- Parking Space for two additional vaporizer.
- Non-return cum Pressure Relief Valve Minimize risk of back flow of gases.

- Blows off valve when pressure exceeds 200 cm of water column fitted.
- Provision to fit Ventilator.
- Provision to fit Carbon Dioxide Absorber.
- Extended platform at rear for two 'B' type cylinder.
- Table top made of stainless Steel.
- Top tray at eye level to keep monitoring instrument.
- Maggill's circuit or Bains circuit.\* One spacious Drawer on smooth runner.
- Four Castor trolley with front two lockable Wheels.
- Pin Index Yokes two for Oxygen and two for Nitrous Oxide.
- High-efficiency Regulators for reliability Two Each for O2 & N2O.



Model No:- GT-64

## SCRUB STATION-MANUAL

- Fabricated from heavy gauge type 304 SS, stainless steel & with seamless welded construction polished to a satin finish.
- Designed to be installed on the wall using a mounting carrier from both the sides & can be operated by foot, by a knee by Automation & by the elbow.
- Scrubs sink provided with a front access panel which is easily removed for access to the water control valves, waste connections, stops & SS pipes.

Options:

1. One bay elbow operated
2. One bay foot operated
3. Two bay elbow operated
4. Two bay foot operated





Model No:- GT-65

PATIENT WAITING CHAIR

**CRC Chrome Plated Non Rotatable WAITING CHAIR,  
For Hospital, Seating Capacity: 3**

**Technical Specifications:**

Overall size: -  
1830 mm L x 500 mm W x 400 mm H

- 1)Three seater
- 2)Chrome plated
- 3)Trendy design



PATIENT WAITING CHAIR

Model No:- GT-66

**STAINLESS STEEL Non Rotatable WAITING CHAIR,  
For Hospital, Seating Capacity: 3**

**Technical Specifications:**

Overall size: - 1830 mm L x 500 mm W x 400 mm H

- 1)Three seater
- 2)Stainless Steel Grade 202/304
- 3)Heavy design





# GYNOTECH

Deals In All Medical Equipment

## BLAZE GT - 67

Intensity	1,50,000+1,50,000 Lux
Spot Diameter	100 - 150 mm
Depth Illumination	10 - 15 cm
Colour Temp.	4300 - 5200 K
Colour Rendering Index	95 Ra
Focusing	Fix
LED Average Life	>50000 Hrs.
Number of LED	54+54
Diameter of Light	550 mm
Intensity Control	10~99 Digital Touch
Power Supply	220V/50Hz AC drive by DC 24 volt
Power Consumption	60 Watts
Special Function	remote operated

Ultra Light Focus

Unique Air Flow

Color Temperature



## BLAZE GT - 68



Ultra Light Focus

Unique Air Flow

Color Temperature

Intensity	1,00,000 Lux
Spot Diameter	100 - 150 mm
Depth Illumination	10 - 15 cm
Colour Temp.	4300 - 5200 K
Colour Rendering Index	95 Ra
Focusing	Fix
LED Average Life	>50000 Hrs.
Number of LED	36
Diameter of Light	550 mm
Intensity Control	10~99 Digital Touch
Power Supply	220V/50Hz AC drive by DC 24 volt
Power Consumption	40 Watts
Special Function	remote operated

## BLAZE GT - 69

Intensity	1,50,000 Lux
Spot Diameter	100 - 150 mm
Depth Illumination	10 - 15 cm
Colour Temp.	4300 - 5200 K
Colour Rendering Index	95 Ra
Focusing	Fix
LED Average Life	>50000 Hrs.
Number of LED	54
Diameter of Light	550 mm
Intensity Control	10~99 Digital Touch
Power Supply	220V/50Hz AC drive by DC 24 volt
Power Consumption	60 Watts
Special Function	remote operated

Ultra Light Focus

Unique Air Flow

Color Temperature



LED SERIES



# GYNOTECH

Deals In All Medical Equipment

## Baby Warmer Infant Radiant Warmer

### SPECIFICATION

- Microprocessor based design.
- Clear large display.
- Scan Mode Operation.
- Programmable Alarm Mute Time.
- Automatic Over Heat and over Temp Protective System.
- Infrared Heater.
- Servo - Manual Mode Operation.
- Halogen Lamp For Observation.
- Integrated Bed with up down tilting Facility.
- Swivel Heater Unit.
- PT 100 Temp Probe.
- Accuracy  $\pm 10$  Deg C.
- Set Temp range 30-38.7 deg C.
- Alarm for temp-low, Temp High, Probe Failure, Power Failure, System Failure.
- Power Supply 180- 290v/AC/50Hz.
- Heater Power Rating 600w/Halogen Lamp-50W.
- The Distance of Heater Source to Baby 85cms.
- Dimension Bay Tray 730mm L x 520 mm W x 50mm H



Office Add:- 164, Bharat Puri-A, Industrial Area, Talkatora, Lucknow, Uttar Pradesh - 226011

Branch Office:- Sujan Complex, Boring Canal Road, Patna, Bihar - 800 001

Mob No:- 8630789839, 9304677347


Email:- [info@gynotech.in](mailto:info@gynotech.in)

Website:- [www.gynotech.in](http://www.gynotech.in)



# GYNOTECH

Deals In All Medical Equipment



Patient Monitor 5 Para



Patient Monitor 3 Para



ECG Machine 3/6/12 Channel



Suction Machine



Syringe Pump



BIPAP/CPAP Machine



Infusion Pump



Oxygen Concentrator



Fetal Doppler



Office Add:- 164, Bharat Puri-A, Industrial Area, Talkatora, Lucknow, Uttar Pradesh - 226011

Branch Office:- Sujan Complex, Boring Canal Road, Patna, Bihar - 800 001

Mob No:- 8630789839, 9304677347

Email:- [info@gynotech.in](mailto:info@gynotech.in)

Website:- [www.gynotech.in](http://www.gynotech.in)



# GYNOTECH

Deals In All Medical Equipment

## BLAZE GT - 70

Intensity	1,20,000 Lux
Spot Diameter	100 - 150 mm
Depth Illumination	10 - 15 cm
Colour Temp.	4300 - 5200 K
Colour Rendering Index	95 Ra
Focusing	Adjustable
LED Average Life	>50000 Hrs.
Number of LED	76
Diameter of Light	650 mm
Intensity Control	10-99 Digital Touch
Power Supply	220V/50Hz AC drive by DC 24 volt
Power Consumption	80 Watts
Special Function	remote operated



Ultra Light Focus

Unique Air Flow

Color Temperature

## BLAZE GT - 71



Ultra Light Focus

Unique Air Flow

Color Temperature

Intensity	1,50,000
Spot Diameter	100 - 150 mm
Depth Illumination	10 - 15 cm
Colour Temp.	3800-5200 K
Colour Rendering Index	91 Ra
Focusing	Manual
LED Average Life	>50000 Hrs.
Number of LED	84
Diameter of Light	640mm
Intensity Control	10-100 Digital
Power Supply	220V/50Hz AC
Power	100 Watt
Special Function	5 Memory Function

Optional Remote


## BLAZE GT - 72

Lux Power Intensity	: 1,20,000 + 1,20,000
Color Rendering Index	: 95
Number of led	: 76 + 76
Depth Lumination	: 10 - 15mm
Colour Temp.	: 4300-5200K
Dimming	: 10% ---100%
LED Average Life	: >50000 Hrs
Power Supply	: 220V/50 Drive by 24 volt
Focusing	: Adjustable By Handle

Ultra Light Focus

Unique Air Flow

Color Temperature

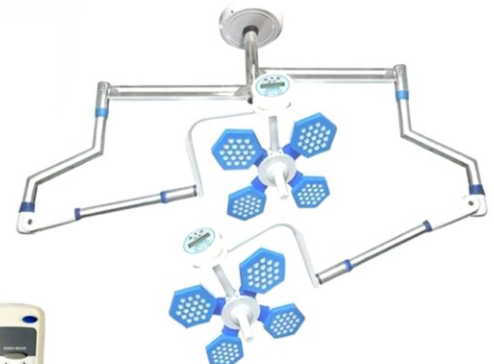

LED SERIES

# GYNOTECH

Deals In All Medical Equipment

## Our Products

- ICU BED
- FOWLER BED
- SEMI - FOWLER BED
- HYDRAULIC OT TABLE
- SEMI - ELECTRIC OT TABLE
- ELECTRIC OT TABLE
- ELECTRO - MANUAL OT TABLE
- LED OT LIGHT
- BABY WARMER
- PHOTOTHERAPY MACHINE
- ALL HOSPITAL FURNITURE
- LAPAROSCOPIC SET
- HYSTEROSCOPIC SET
- HD COLOPOSCOPE
- CTG/NST/FETAL MONITOR
- IUI FULL LAB SET
- BIPAP/CPAP MACHINE
- OXYGEN CONCENTRATOR MACHINE
- DEFIBRILLATOR MACHINE
- PATIENT MONITOR 5/3 PARA
- ECG MACHINE 3/6/12 CHANNEL
- VENTILATOR



Office Add:- 164, Bharat Puri-A, Industrial Area, Talkatora,  
Lucknow, Uttar Pradesh - 226011

Branch Office:- Sujan Complex, Boring Canal Road,  
Patna, Bihar - 800 001

Mob No:- 8630789839, 9304677347

Email:- [info@gynotech.in](mailto:info@gynotech.in)

Website:- [www.gynotech.in](http://www.gynotech.in)